ENGINEERING DEPARTMENT

BUILDINGS DIVISION, BANGALORE.

Abstract Notification dated 28th September 1936.

The attention of the public is invited to the Notification, calling for tenders for constructing the Kannada Boys' Middle School at Mamoolpet, Bangalore City, on pages 1567-1571 of Part VI of the *Mysore Gazette*, dated 1st October 1936.

2. The last date of receiving tenders is 12th October 1936.

N. KRISHNAIENGAR,
Executive Engineer.

OFFICE OF THE EXECUTIVE ENGINEER, KRISHNARAJASAGARA DIVISION, KRISHNARAJ SAGAR.

Abstract Notification dated 23rd September 1936.

The attention of the public is invited to the Notification No. 792, dated 23rd September 1936, published on pages 1571, Part VI of the *Mysore Gazette*, dated Thursday the 1st October 1936, for the sale of portable steam engine 6 H.P. available at Hulikere Tunnel Works, near Bydarahalli Railway Station, Mysore Railways.

Abstract Notification dated 25th September 1936.

The attention of contractors is invited to the Notification No. 793, dated 23rd September 1936, published in the *Mysore Gaette*, dated 1st October 1936, pages 1571-1572, Part VI, for claiming the amounts outstanding in the accounts of this Division.

Abstract Notification dated 25th September 1936.

The amounts noted in Notification No.....dated 25th September 1936 published on page 1572, Part VI of the *Mysore Gazette*, dated 1st October 1936, represent the excess recoveries from the contractors towards advances and are outstanding for the last one year. If they are not claimed within one month from this date, they will be credited to Government.

G. SESHAGIRI RAO,
Executive Engineer.

HASSAN DIVISION.

Notification dated 27th September 1936.

Notice is hereby given that sealed tenders will be received at the Office of the Executive Engineer, Hassan Division, up to 17th October 1936, up to 2 P.M. for constructing Senior Operator's quarters at Hole-Narsipur. An approximate estimate of quantities is given below. These quantities are not guaranteed. The work should be completed by the end of April 1937.

2. The plans, detailed estimate and conditions may be seen at the Executive Engineer's Office at Hassan, between the hours of 11 A.M. and 5 P.M.

3. Tenders should be submitted on printed forms which may be obtained from the Executive Engineer. The tenders should be accompanied by a statement in the form given below, showing the rates at which the different items specified will be executed.

4. Each tender must be accompanied by a deposit of Rs. 175 in cash or Government Promissory Notes, as earnest money, and be superscribed "Tender for constructing Senior Operator's quarters at Hole-Narsipur," in default of which tenders will be rejected.

5. The final acceptance of any tender will rest with the Executive Engineer, who does not bind himself to accept the lowest or any tender or to assign any reason whatever for the rejection of [illegible]nder.

[illegible]ithin eight days of the acceptance of the tender, the successful competitor will be required [illegible]e usual contract bond, in default of which his tender will be considered cancelled [illegible] money will be forfeited.

[illegible]e of the successful competitor, whose tender has been accepted, will be posted on [illegible]n the Executive Engineer's Office, in due course. No enquiries regarding the [illegible]ion of a tender will receive any reply.

8. On acceptance of one of the tenders, the earnest money on rejected tenders will be returned.

9. Rates once tendered will not be enhanced on any account.

10. Rates for non-tendered and non-estimated items shall be as per schedule rates of the Department or those fixed by the Executive Engineer after working out data with not more than 10 per cent for contractor's profit.

11. In all matters not specifically provided for and in all matters of dispute about rates, quantities, measurements, quality of works, etc., and in all disputes of any kind, the decision of the Executive Engineer will be final and legally binding.

12. Quotations must be given in words as well as in figures and they must be in specific term of unit shown against each item of work. Any quotation quoted at so much percentage less or more than estimated rate will not be accepted.

Abstract estimate for constructing Senior Operators' Quarters at Hole-Narsipur.

Item No.	Description of work	Per	Rate	Quantity	Cost
			Rs. a. p.		
1	Earthwork excavation in ordinary soil and filling in basement	C.yd.	0 3 0	59	
2a	Stone jelly in lime mortar for foundation ..	C.ft.	0 4 0	442	
b	Size stone in clay for foundation and basement	,,	0 4 6	1,383	
c	Burnt brick in clay superstructure	,,	0 3 6	1,944	
d	Burnt brick in mortar	,,	0 4 6	552	
e	Burnt stone slabs 6" thick dressed and fixed in mortar	S.ft.	0 8 0	171	
f	Do do 3" thick fixed over beams	,,	0 5 0	28	
g	Pointing with cement mortar	,,	4 0 0	2.4	
h	Plastering with lime mortar	Sqr.	4 0 0	48.22	
i	White and colour washing	,,	0 5 0	50.62	
j	Plain cornice 9"	R.ft.	0 8 0	52	
k	Parapet wall 9" thick 1½' high brick in mortar complete with plastering	,,	0 12 0	50	
3	Flooring with 1" cement concrete on a bed of 3" lime concrete	Sqr.	20 0 0	8.4	
4a	Roofing with I class Mangalore Tiles on teak-reepers	,,	24 0 0	12.03	
b	Ridge tiles set in mortar	,,	0 8 0	73	
c	Madras terrace including plastering etc., complete	,,	40 0 0	2.89	
d	Honney wood work wrought and put up complete with wood oiling	C.ft.	3 8 0	60.00	
e	Plain teakwood eve board 9"	R.ft.	0 9 0	130	
f	Teakwood doors with battened shutters 1" thick including fixing hinges, etc., complete ..	S.ft.	1 12 0	163	
g	Teakwood windows with panelled shutters 1" thick including iron fittings, etc., complete	,,	2 0 0	110	
5	Providing and fixing R. S. beams with pointing, etc., complete	Cwt.	10 0 0	14.8	
6	Expanded metal framing with teak frame with door ways, etc., complete	S.ft.	0 12 0	111	
7	Chocolate painting 2 coats	Sqr.	3 8 0	11.17	
8	Ventilating tiles fixed in lime mortar ..	Each	2 0 0	6	
9	Constructing sinks, etc., complete with plastering, etc.	Each	5 0 0	2	
10	Providing and fixing mortar and pestle ..	,,	10 0 0	1	
11	Mortar bands at roof ends	R.ft.	0 2 6		
12	Rain water down pipes 3" diameter fixed ..	R.ft.	0 6 0		
13	Providing silk pattern drain alround leading to absorption pit, etc.	L. S.	Rs.		

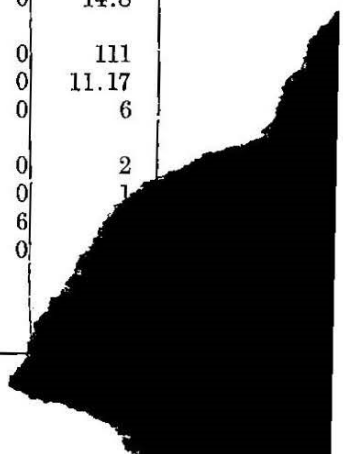

Item No.	Description of work	Per	Rate	Quantity	Cost
			Rs. a. p.		
	Latrine.				
1	Earthwork excavation	C.yd.	0 3 0	4	
2*a*	Course rubble stone in clay	C.ft.	0 3 3	130	
b	Burnt brick in lime mortar	„	0 5 0	196	
c	Chunam plastering	Sqr.	4 0 0	4.91	
d	Cement pointing	„	4 0 0	0.56	
e	White and colour washing	„	0 5 0	5.47	
f	Cement plastering ½″ thick	„	9 0 0	0.79	
g	Tar washing 2 coats	„	2 0 0	0.63	
3	Flooring with 3″ concrete and cement plastering ½″ thick	„	20 0 0	0.38	
4	Fixing outlets and constructing drains, etc. ..	L. S.	Rs.		
5	Providing galvanized iron sheet tubs 12″×6″ with tarring.	Each	1 0 0	6	

Notification dated 28th September 1936.

Notice is hereby given that sealed tenders will be received at the Office of the Executive Engineer, Hassan Division, up to 17th October 1936 up to 2 P.M., for constructing two Junior Operators' Quarters of Electrical Department at Hassan. An approximate estimate of quantities is given below. These quantities are not guaranteed. The work should be completed by the end of April 1937.

2. The plans, detailed estimate and conditions may be seen at the Executive Engineer's Office at Hassan, between the hours of 11 A.M. and 5 P.M.

3. Tenders should be submitted on printed forms which may be obtained from the Executive Engineer. The tenders should be accompanied by a statement in the form given below, showing the rates at which the different items specified will be executed.

4. Each tender must be accompanied by a deposit of Rs. 200 in cash or Government Promissory Notes, as earnest money, and be superscribed "Tender for constructing Operators' quarters of the Electrical Department at Hassan," in default of which tenders will be rejected.

5. The final acceptance of any tender will rest with the Executive Engineer, who does not bind himself to accept the lowest or any tender or to assign any reason whatever for the rejection of any tender.

6. Within eight days of the acceptance of the tender, the successful competitor will be required to execute the usual contract bond, in default of which his tender will be considered cancelled, and his earnest money will be forfeited.

7. The name of the successful competitor, whose tender has been accepted, will be posted on the Notice Board in the Executive Engineer's Office in due course. No enquiries regarding the acceptance or rejection of a tender will receive any reply.

8. On acceptance of one of the tenders, the earnest money on rejected tenders will be returned.

9. Rates once tendered will not be enhanced on any account.

10. Rates for non-tendered and non-estimated items shall be as per schedule rates of the Department or those fixed by the Executive Engineer after working out data with not more than 10 per cent for contractor's profit.

11. In all matters not specifically provided for and in all matters of dispute about rates, quantities, measurements, quality of works, etc., and in all disputes of any kind, the decision of the Executive Engineer will be final and legally binding.

12. Quotations must be given in words as well as in figures and they must be in specific term of unit shown against each item of work. Any quotation quoted at so much percentage less or more than estimated rate will not be accepted.

Details of estimate for the construction of Quarters for the Junior Operators of the Electrical Department at Hassan.

Item No.	Description of work	Per	Rate	Quantity	Cost
			Rs. a. p.		
1	Earthwork excavation for foundation filling in basement	C.yd.	0 3 0	52	
2	Stone jelly concrete in lime mortar	C.ft.	0 4 0	363	
3	Size stone in mortar	C.ft.	0 5 0	1,067	

Item No.	Description of work	Per	Rate	Quantity	Cost
4	Burnt brick in clay	C.ft.	0 3 6	2,566	
5	Burnt brick in mortar	,,	0 4 0	200	
6	Burnt stone slabs 6″ thick, dressed and fixed ..	S.ft.	0 8 0	190	
7	Cement concrete slab	C.ft.	1 0 0	20	
8	Teakwood doors with panelled shutters including iron fittings, etc., complete ..	S.ft.	1 12 0	364	
9	Do do windows ..	,,	2 0 0	96	
10	Teakwood shelves with 2 planks shutters with locking arrangement, etc., complete ..	S.ft.	1 8 0	96	
11	Teakwood wrought and put up with wood oiling	C.ft.	4 8 0	59·84	
12	Roofing with I Class Mangalore Tiles on teak reepers	Sqr.	24 0 0	14·35	
13	Ridge tiles set in mortar with cement pointing..	R.ft.	0 8 0	84	
14	Supplying and fixing R. S. joists with cement wash	Cwt.	12 0 0	20	
15	Boxing girder with cement concrete ..	R.ft.	1 0 0	20	
16	Madras terrace complete with plastering ..	Sqr.	40 0 0	3·68	
17	Plain cornice 6″	R.ft.	0 6 0	63	
18	Parapet wall 9″×1′ with cornice	,,	0 8 0	60	
19	Flooring with 2″ cement concrete on 3″ lime concrete with necessary plastering, etc., complete	Sqr.	20 0 0	9·00	
20	Plastering with lime mortar	,,	4 0 0	47·92	
21	Chocolate painting 2 coats	,,	3 0 0	9·2	
22	Cement pointing to basement	,,	4 0 0	2·21	
23	White washing	,,	0 4 0	48·00	
24	Providing and fixing rain water pipes ..	R.ft.	0 6 0	24	
25	Mortar bands at roof ends 6″×6″	,,	0 2 6	49	
26	Expanded metal screen for front verandha with teakwood frame of 3″×3″	S.ft.	0 12 0	125	

Abstract estimate for constructing Latrine attached to Junior Operators' quarters at Hassan.

Item No.	Description of work	Per	Rate	Quantity	Cost
			Rs. a. p.		
1	Earthwork excavation	C.yd.	0 3 0	4	
2*a*	Course rubble stone in clay	C.ft.	0 3 3	130	
b	Burnt brick in lime mortar	,,	0 5 0	196	
c	Chunam plastering	Sqr.	4 0 0	4·91	
d	Cement pointing	,,	4 0 0	0·56	
e	White and colour washing	,,	0 5 0	5·47	
f	Cement plastering ½″ thick	,,	9 0 0	0·79	
g	Tar washing 2 coats	,,	2 0 0	0·63	
3	Flooring with 1½″ cement concrete on 3″ ordinary concrete and cement plastering ½″ thick	,,	20 0 0	0·38	
4	Fixing outlets and constructing drains, etc ..	L. S.	Rupees.		
5	Providing galvanized iron sheet tubs 12″×6″ with tarring	Each	1 0 0	6	

Notification dated 27th September 1936.

Notice is hereby given that sealed tenders will be received at the Office of the Executive Engineer, Hassan Division, up to 17th October 1936, up to 2 P.M., for Constructing 1½ blocks of Linemen's Quarters at Holenarsipur. An approximate estimate of quantities is given below. These quantities are not guaranteed. The work should be completed by the end of April 1937.

2. The plans, detailed estimate and conditions may be seen at the Executive Engineer's Office at Hassan, between the hours of 11 A.M. and 5 P.M.

3. Tenders should be submitted on printed forms which may be obtained from the Executive Engineer. The tenders should be accompanied by a statement in the form given below, showing the rates at which the different items specified will be executed.

4. Each tender must be accompanied by a deposit of Rs. 160 in cash or Government Promissory Notes as earnest money, and be superscribed "Tender for Constructing 1½ blocks of Linemen's quarters at Hole-Narsipur," in default of which tenders will be rejected.

5. The final acceptance of any tender will rest with the Executive Engineer, who does not bind himself to accept the lowest or any tender or to assign any reason whatever for the rejection of any tender.

6. Within eight days of the acceptance of the tender, the successful competitor will be required to execute the usual contract bond, in default of which his tender will be considered cancelled, and his earnest money will be forfeited.

7. The name of the successful competitor, whose tender has been accepted, will be posted on the Notice Board in the Executive Engineer's Office in due course. No enquiry regarding the acceptance or rejection of a tender will receive any reply.

8. On acceptance of one of the tenders, the earnest money on rejected tenders will be returned.

9. Rates once tendered will not be enhanced on any account.

10. Rates for non-tendered and non-estimated items shall be as per schedule rates of the department or those fixed by the Executive Engineer after working out data with not more than 10 per cent for contractor's profit.

11. In all matters not specifically provided for and in all matters of dispute about rates, quantities, measurements, quality of works, etc., and in all disputes of any kind, the decision of the Executive Engineer will be final and legally binding.

12. Quotations must be given in words as well as in figures and they must be in specific term of unit shown against each item of work. Any quotation quoted at so much percentage less or more than estimated rate will not be accepted.

Abstract estimate for constructing 1½ blocks of Line men's Quarters at Hole-Narsipur (for the Electrical Department).

Item No.	Description of work	Per	Rate	Quantity	Cost
	Details for 1 Block.		Rs. a. p.		
1	Earthwork excavation for foundation and filling in basement	C.yd.	0 3 0	33	
2*a*	Stone jelly concrete in lime mortar for foundation	C.ft.	0 4 3	287	
b	Course rubble stones masonry in clay ..	,,	0 3 3	911	
c	Burnt brick in lime mortar	,,	0 5 0	347	
d	Burnt brick in clay	,,	0 3 6	1,747	
e	Stone slabs 4″ thick, roughly dressed and fixed in lime mortar	S.ft.	0 6 0	115	
f	Binding wall 6″×6″ of brick in lime mortar including chunam plastering	R.ft.	0 2 6	28	
g	Plastering with lime mortar	Sqr.	4 0 0	43·5	
h	Pointing with cement mortar	,,	4 0 0	1·45	
i	White and colour washing 2 coats	,,	0 5 0	44·60	
3*a*	Roofing with I Class Mangalore Tiles on teak reepers including wood oiling	,,	24 0 0	13·18	
b	Ridge tiles set in mortar including cement pointing	R.ft.	0 9 0	68	
c	Ventilating tiles	Each	2 0 0	16	
4	Honney wood work wrought and put up complete with wood oiling	C.ft.	3 8 0	50·00	
5*a*	Teakwood doors with battened shutters 1″ thick with necessary iron fittings, etc., complete ..	S.ft.	1 12 0	78	
b	Teakwood windows with panelled shutters 1″ thick with iron fittings, etc., complete ..	,,	2 0 0	60	
c	Silicate painting 2 coats	Sqr.	3 8 0	3·06	
6	Constructing sinks in bath rooms	Each	5 0 0	4	
7	Providing and fixing mortar and pestles ..	,,	10 0 0	4	
8	Constructing silk pattern drain alround leading to absorption pit	L.S.	Rupees.		

Item No.	Description of work	Per	Rate	Quantity	Cost
	Latrines.		Rs. a. p.		
1	Earthwork excavation	C.yd.	0 3 0	4	
2*a*	Course rubble stone in clay	C.ft.	0 3 3	130	
b	Burnt brick in lime mortar	,,	0 5 0	196	
c	Chunam mortar plastering	Sqr.	4 0 0	4·91	
d	Cement pointing	Sqr.	4 0 0	0·56	
e	White and colour washing	,,	0 5 0	5·47	
f	Cement plastering $\frac{1}{2}$″ thick	,,	9 0 0	0·79	
g	Tar washing 2 coats	,,	2 0 0	0·63	
3	Flooring with $1\frac{1}{2}$″ cement concrete on 3″ ordinary concrete including $\frac{1}{2}$″ cement plastering	Sqr.	20 0 0	0·38	
4	Fixing outlets and constructing drains, etc. ..	L. S.	Rupees		
5	Providing galvanized iron sheet tubs 12″×6″ with tarring	Each	1 0 0	6	

Notification dated 27th September 1936.

Notice is hereby given that sealed tenders will be received at the Office of the Executive Engineer, Hassan Division, up to 17th October 1936, up to 2 P.M., for Constructing two Junior Operators' quarters of the Electrical Department at Hole-Narsipur. An approximate estimate of quantities is given below. These quantities are not guaranteed. The work should be completed by the end of April 1937.

2. The plans, detailed estimate and conditions may be seen at the Executive Engineer's office at Hassan, between the hours of 11 A.M. and 5 P.M.

3. Tenders should be submitted on printed forms which may be obtained from the Executive Engineer. The tenders should be accompanied by a statement in the form given below, showing the rates at which the different items specified will be executed.

4. Each tender must be accompanied by a deposit of Rs. 200 in cash or Government Promissory Notes, as earnest money, and be superscribed "Tender for constructing Operators' quarters of the Electrical Department at Hole-Narsipur," in default of which tenders will be rejected.

5. The final acceptance of any tender will rest with the Executive Engineer, who does not bind himself to accept the lowest or any tender or to assign any reason whatever for the rejection of any tender.

6. Within eight days of the acceptance of the tender, the successful competitor will be required to execute the usual contract bond, in default of which his tender will be considered cancelled and his earnest money will be forfeited.

7. The name of the successful competitor, whose tender has been accepted, will be posted on the Notice Board in the Executive Engineer's Office, in due course. No enquiries regarding the acceptance or rejection of a tender will receive any reply.

8. On acceptance of one of the tenders, the earnest money on rejected tenders will be returned.

9. Rates once tendered will not be enhanced on any account.

10. Rates for non-tendered and non-estimated items shall be as per schedule rates of the Department or those fixed by the Executive Engineer after working out data with not more than 10 per cent for contractor's profit.

11. In all matters not specifically provided for and in all matters of dispute about rates, quantities, measurements, quality of works, etc., and in all disputes of any kind, the decision of the Executive Engineer will be final and legally binding.

12. Quotations must be given in words as well as in figures and they must be in specific term of unit shown against each item of work. Any quotation quoted at so much percentage less or more than estimated rate will not be accepted.

Abstract estimate for the construction of Junior Operators' Quarters for the Electrical Department at Hole-Narsipur.

Item No.	Description of work	Per	Rate	Quantity	Cost
			Rs. a. p.		
1	Earthwork excavation for foundation and filling in basement	C.yd.	0 3 0	52	
2	Stone jelly concrete in lime mortar	C.ft.	0 4 0	363	
3	Size stone in mortar	C.ft.	0 5 0	1,067	
4	Burnt brick in clay	"	0 3 6	2,566	
5	Burnt brick in mortar	"	0 4 0	200	
6	Burnt stone slabs 6″ thick, dressed and fixed	S.ft.	0 8 0	190	
7	Cement concrete slab	C.ft.	1 0 0	20	
8	Teakwood doors with panelled shutters including iron fittings, etc., complete	S.ft.	1 12 0	364	
9	Do do windows	"	2 0 0	96	
10	Teakwood shelves with 2 planks shutters, locking arrangement complete	"	1 8 0	96	
11	Teakwood wrought and put up including wood oiling	C.ft.	4 8 0	59·84	
12	Roofing with I Class Mangalore Tiles on teak reepers	Sqr.	24 0 0	14·35	
13	Ridge tiles set in mortar with cement pointing	R.ft.	0 8 0	84	
14	Supplying and fixing R. S. joists with cement wash	"	1 0 0	20	
15	Boxing girders with cement concrete	R.ft.	1 0 0	20	
16	Madras terrace complete with plastering	Sqr.	40 0 0	3·68	
17	Plain cornice 6″	R.ft.	0 6 0	63	
18	Parapet wall 9″×1′ with cornice	"	0 8 0	60	
19	Flooring with 2″ cement concrete on 3″ lime concrete with necessary plastering, etc., complete	Sqr.	20 0 0	9·00	
20	Plastering with lime mortar	"	4 0 0	47·92	
21	Chocolate painting 2 coats	"	3 0 0	9·2	
22	Cement pointing to basement	"	4 0 0	2·21	
23	White washing	"	0 4 0	48·00	
24	Providing and fixing rain water pipes	R.ft.	0 6 0	24	
25	Mortar bands at roof ends 6″×6″	"	0 2 6	49	
26	Expanded metal screen for front verandah with teakwood frame of 3″×3″	S.ft.	0 12 0	125	

Abstract estimate for constructing Latrine attached to Junior Operators' quarters' at Hole-Narsipur.

Item No.	Description of work	Per	Rates	Quantity	Cost
			Rs. a. p.		
1	Earthwork excavation	C.yd.	0 3 0	4	
2*a*	Course rubble stone in clay	C.ft.	0 3 3	130	
b	Burnt brick in lime mortar	"	0 5 0	196	
c	Chunam plastering	Sqr.	4 0 0	4·91	
d	Cement pointing	"	4 0 0	0·56	
e	White and colour washing	"	0 5 0	5·47	
f	Cement plastering ½″ thick	"	9 0 0	0·79	
g	Tar washing 2 coats	"	2 0 0	0·63	
3	Flooring with 1½″ cement concrete on 3″ ordinary concrete and cement plastering ½″ thick	"	20 0 0	0·38	
4	Fixing outlets and constructing drains, etc.	L. S.	Rupees.		
5	Providing galvanized iron sheet tubs 12″×6″ with tarring	Each	1 0 0	6	

N. LAKSHMINARASIMHAIYA,
Executive Engineer.

6.